

Applications / Markets




Yacht Controls



Security Devices



Industrial Controls



Kiosks



Electrical Housewares



Medical Equipment



SPECIFICATIONS

Electrical Rating: 2A36VDC
Mechanical Life: 200,000 Cycles
Electrical Life: 50,000 Cycles
Contact Resistance: 50mΩ Max.
Insulation Resistance: 1000 MΩ Min.
Dielectric Strength: 2,000VAC
Operating/Storage Temperature: -20°C to 55°C
Travel: 1.50mm
Moisture Protection: IP65
Actuation Force: 4N
Panel Thickness: 1-11mm
Mounting Nut Torque: 5-14Nm

FEATURES & BENEFITS

- 12mm diameter panel cutout
- Variety LED option
- Dot, ring illumination available
- Multiple actuator options
- Pilot indicator option
- IP65 rated,
- Momentary Off-(On), Latching Off-On

PART NUMBER CONFIGURATOR

Series	Actuator Options	Terminal Options	Function Options	Rating Options	Material Options	Illumination Style Options	Led-Color Options	Illumination Voltage Options
L12	☐ F - Flat ☐ H - High	☐ Solder Lug	☐ M - Momentary Off-(On) ☐ Z - Latching Off - On	☐ NONE - Max. 2A36VDC	☐ S - Stainless Steel ☐ B - Nickel plated brass	☐ NONE - Non-Illuminated ☐ D - Dot Illumination ☐ R - Ring Illumination	☐ NONE - Non-Illuminated ☐ W - White ☐ R - Red ☐ O - Orange ☐ G - Green ☐ B - Blue ☐ Y - Yellow	☐ NONE - Base Voltage* 3.3V 6V 12V 24V



NOTES:

* Base voltage on LEDs:





1.8V @ 20mA for Red, Yellow and Orange LED colors
 2.8V @ 20mA for Blue, Green and White LED colors

Specifications subject to change without notice


Anti vandal switch $\phi 12\text{mm}$

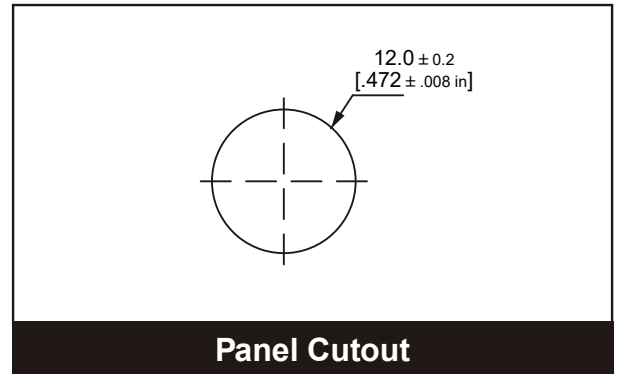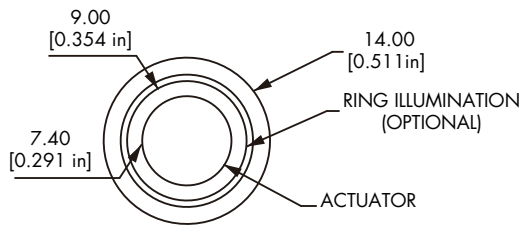


Schematic & Actuator

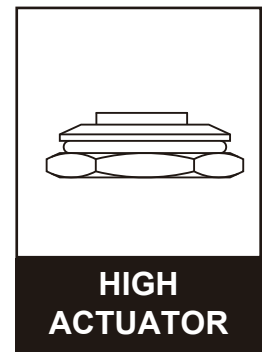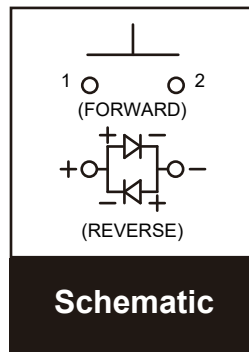


Illumination Options

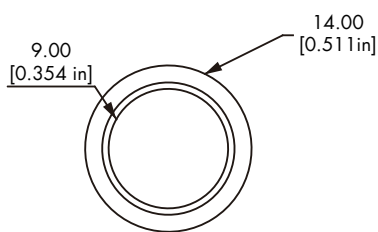

Non-illuminated





Dot-illuminated

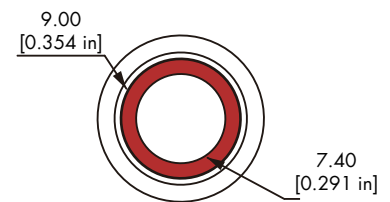




Ring-illuminated

Anti vandal switch $\varnothing 12\text{mm}$


Non-illuminated





Latching





Momentary




Ring-illuminated

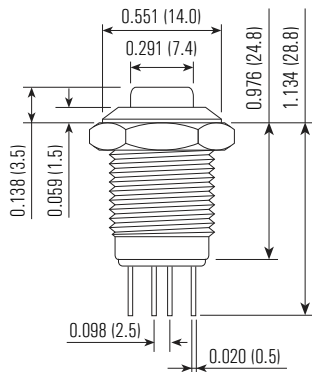



Latching
Illum. terminals

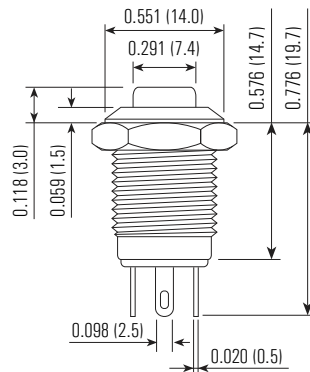



Momentary




Dot-illuminated

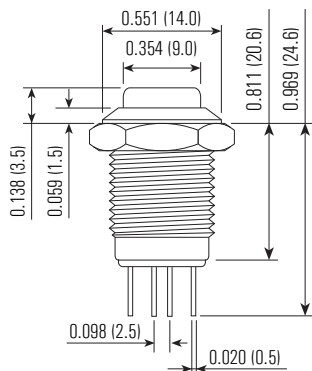

Latching
Illum. terminals

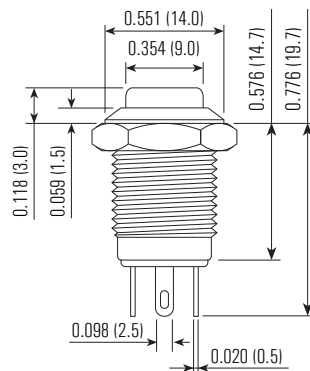

Momentary



©Copyright Langir Electric All Right Reserved.

Disclaimer: The appearance of the products listed on this catalogue, color, parameters are for reference only, issued a kind of Langir Electric Company shall prevail.

Langir Electric Company reserves the right to modify or cancel the relevant parameters of this catalogue does not advance notice. If in doubt, please contact your sales representative.



YUEQING LANGIR ELECTRIC CO., LTD.

ADD: 2F, NO. 10 LONGHE EAST RD, LIUSHI, YUEQING, ZHEJIANG, CHINA 325604

FAX: 86 (577) 62737671

TEL: 86 (577) 62737672 62737670

MAIL: langir@langir.com

[Http://www.langir.com](http://www.langir.com)